



RDS Manufacturing Inc.
300 Industrial Park Dr.
Perry, FL 32348

Contact:
sales@rdsaluminum.com
1-850-584-6898

Auxiliary Fuel Tank Installation Instructions for Gravity Feed


RDS Manufacturing Fuel Tanks are designed to fit in the BED of a truck. Under no circumstance should an RDS Fuel Tank be mounted directly to the FRAME of a vehicle. Failure to adhere to this can cause product failure and will VOID any warranty.

1) Place tank in bed of truck at desired location. Check underneath the bed to insure the desired tab location does not interfere with any components of the truck such as Wiring and Hoses. If the tank has a toolbox make sure the lid has room to open.

2) Mark the tab locations and also mark the front edge of the tank (closest to tailgate). This will be your starting point for the neoprene. Also mark the four spots you will place the neoprene strips, space them as evenly as possible.



3) Drill one 5/16" hole in each tab and the bed of the truck (making sure as to not hit any wiring or other critical components of the truck) for mounting. Drill only one hole per tab. Place a bolt in your first hole to help keep the tank in-place while drilling the other holes.

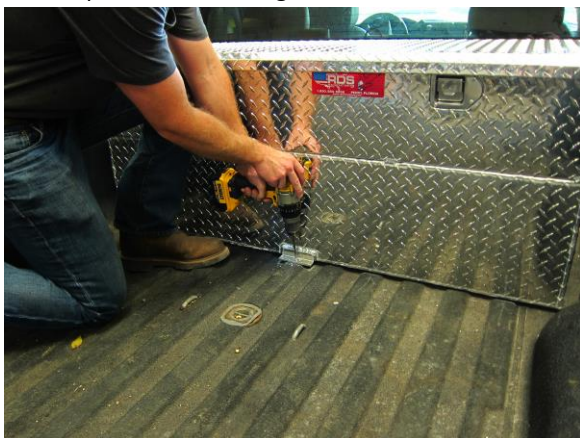



RDS Manufacturing Inc.
300 Industrial Park Dr.
Perry, FL 32348

Contact:
sales@rdsaluminum.com
1-850-584-6898

4) Mark a spot in the side bed that best aligns with the drain plug. Now move the tank out of the way and drill a $\frac{3}{4}$ " hole in the bed for the fuel hose.



5) After drilling the holes for the tabs and fuel line clean any shavings out of the bed.

6) Next you will cut the neoprene into four equal pieces the width of the tank. Place the strips at the four predetermined locations. The strips should be on top (not the valley) of the corrugation (sticky side down).



7) Remove the plug from the bottom of the tank and then install the shutoff valve in the opening. A tiny amount of never seize or pipe tape on the threads is helpful.

8) Double check the diameter of the truck fill hose and confirm you have the right gravity feed kit. Now cut approximately $1\frac{1}{2}$ " of the fill hose. (If truck has a metal fill pipe use the two rubber collars provided to connect the fill hose and adaptor after cutting. Only provided/needed on the dodge kits)



RDS Manufacturing Inc.
300 Industrial Park Dr.
Perry, FL 32348

Contact:
sales@rdsaluminum.com
1-850-584-6898



9) Install the adaptor as horizontal as possible with the control valve upright. Secure the adaptor tightly with the hose clamps.



10) Place your tank back to its desired location and line up the holes previously drilled.

11) Connect the provided hose to the shutoff valve and secure with a hose clamp. Run the hose through the previously drilled $\frac{3}{4}$ " hole.



12) Measure the distance to the adaptor and cut off the unneeded hose. Connect the hose to the control valve on top of the adaptor and secure with a hose clamp.



RDS Manufacturing Inc.
300 Industrial Park Dr.
Perry, FL 32348

Contact:
sales@rdsaluminum.com
1-850-584-6898



13) Place a washer on the $\frac{1}{4}$ " x 2 1/2" bolts. Insert the bolts into the holes. Underneath the bed place a washer, spring, washer and then lock nut on the other side of the bolt. You will need two people to easily bolt the tank. Stop tightening the bolt once the spring starts to compress.



This spring bolt combination will anchor the tank while still allowing the tank to move with the bed of the truck as it travels over rough terrain. This will prevent undue stresses from being passed along to the tank from the truck.

14) Check the top of the trucks main tank to see if there is an open vent. Some trucks will have this some will not. If the truck has an open vent place a piece of hose on the vent and run the hose up into the bed of the truck to the height of the auxiliary tank. A good place to terminate this hose is under the bedrail so that the opening is protected from rainwater.

15) Now is the time to check for leaks and proper operation of the installation kit. Place fuel in the tank and then open the shutoff valve. Look over all areas where you installed hose clamps looking for any signs of fuel leakage. Once you have determined there are no leaks you are ready to hit the road.

16) Keep the truck's factory fuel cap closed when the auxiliary fuel tank has fuel and the shutoff valve is open. Do not try and remove the cap and watch the adapter work.